

BEST AVAILABLE COPY

PCT/GB 2004 /002839



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 17 AUG 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

22 July 2004

DO NOT COPY


1 JUL 2003



1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

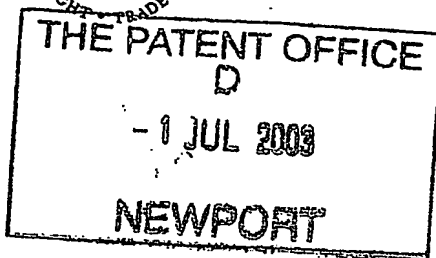

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

GML2807

2. Patent application number

(The Patent Office will fill in this part)

0315342.6

01 JUL 03 F819182-1 D02806

P01/7700 0.00-0315342.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

UNIVERSITY OF SOUTHAMPTON

Highfield  
Southampton  
Hampshire  
SO17 1BJ  
GB

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

00798470001

4. Title of the invention

SOUND REPRODUCTION SYSTEMS FOR  
USE BY ADJACENT USERS

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

BARKER BRETTELL  
Medina Chambers  
Town Quay  
Southampton SO14 2AQ  
GB

Patents ADP number (*if you know it*)

07442494001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 12

Claim(s) 4

Abstract

Drawing(s) 6 & 6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Geoffrey M Lomas*

Date

30.06.2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Geoffrey M Lomas  
Telephone: 023 8033 6970

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## SOUND REPRODUCTION SYSTEMS FOR USE BY ADJACENT USERS

The present invention relates to sound reproduction systems for use by adjacent users, and relates particularly, but not exclusively, to systems  
5 employing headrest loudspeakers in the headrests of adjacent vehicle seats.

When two people are listening to different audio signals in adjacent seats in an aircraft or road vehicle, each person wants to hear their own audio signal faithfully reproduced, with a minimum of interference from the  
10 other person's audio signal.

### INTRODUCTION

In this specification two methods will be discussed that can substantially isolate the acoustic environments of two people in adjacent seats, when the sound is reproduced through loudspeakers in the seat headrests. In  
15 the first method, feedforward control techniques are used to minimise the sound from the loudspeakers on one seat at the position of the adjacent person using the loudspeakers on the second seat as secondary sources. In the second method an array of acoustic sources is used to generate a large pressure in one region of their nearfield, to reproduce the sound for  
20 one person, but to minimise the sound pressure in another region, corresponding to the position of the adjacent person. Numerical simulations of the performance of both these techniques are presented below for simplified acoustic models in the free-field.

According to one aspect of the invention we provide a sound  
25 reproduction system for providing sound to two adjacent first and second users, the system comprising first speaker means positioned adjacent to the intended head position of the first user, and second speaker means

positioned adjacent to the intended head position of the second user, a first channel connected to the first speaker means to enable, in use, the first user to listen to sound conveyed by said first channel, and a second channel connected to the second speaker means to enable, in use, the second user to listen to sound conveyed by said second channel, and a feedforward compensating filter means ( $H_1, H_2$ ) having an input connected to the inputs to the first speaker means, and an output connected to the input to the second speaker means, the compensating filter means being so configured as to provide to the second speaker means a modified version of the signals being fed on said first channel to the first speaker means, said compensating filter means ( $H_1, H_2$ ) having been determined to reduce the sound that would be perceived by the second user to have been emitted by the first speaker means.

Preferably the filter means ( $H_1, H_2$ ) has been determined by calculating the vector of complex pressures  $\mathbf{p} = [p_1 p_2]^T$  using an equation of the form  $\mathbf{p} = \mathbf{p}_p + \mathbf{Z}\mathbf{q}_s$ , where  $\mathbf{p}_p$  is the pressure at the head position of the second user due to the primary sound source of said first speaker means, and  $\mathbf{Z}$  is the matrix of acoustic impedances between  $\mathbf{p}$  and  $\mathbf{q}_s$  of the second speaker means, and  $\mathbf{q}_s = \mathbf{q}_{s,\text{opt}} = -\mathbf{Z}^{-1} \mathbf{p}_p$  where the complex volume velocities of the speakers of the second speaker means are  $\mathbf{q}_s = [q_{s1} q_{s2}]^T$ .

One method of designing the compensating filter means is to adjust adaptive filters in an error minimisation filter design procedure, such as that discussed in patent specification EP 0434691A.

Conveniently the first and second speaker means are mounted on or in first and second adjacent head rest assemblies but they could be mounted in other panel structures adjacent to the user head positions.

5 The speaker means preferably each comprise right and left speakers which are situated in use adjacent to the right and left sides of the respective user's head.

The speaker means are preferably housed in wings of the head rest, the speakers facing generally towards the respective head positions.

10 According to a second aspect of the invention we provide a sound reproduction system for providing sound to two adjacent first and second users, the system comprising first and second speaker means positioned respectively adjacent to the intended head positions of the first and second users, each speaker means comprising a pair of speakers one of which faces inwards towards the head position of the first user, and the  
15 other faces outwards from said head position and generally towards the intended head position of the second user, filter means ( $H_1$ ) controlling the input to the outwardly facing speaker relative to the input applied to the inwardly facing speaker, the filter means ( $H_1$ ) being designed by adjusting the filter coefficients thereof so as to reduce the sound that  
20 would be perceived by the second user due to the first speaker means.

The filter means may be designed by adjusting the filter coefficients thereof so as to maximise the ratio of the mean square pressures in the zone occupied in use by the head of the first user relative to the mean square pressures in the zone occupied in use by the head of the second  
25 user.

The inwardly and outwardly facing speakers of the first speaker means are used as a nearfield array, and the filter means  $H_1$  is configured to reproduce sound signals at the head of the first user but to attenuate this signal at the head of the second user.

- 5 The filter means may be designed by adjusting adaptive filters in an error minimisation filter design procedure.

A convenient technique for designing the filter means ( $H_1$ ) is by adjusting the filter coefficients such that the pressure, or the mean pressure, at one or more discrete locations in the region of the second head position, at a particular frequency, due to sound emitted by the first and second speakers, is substantially zero.

A convenient embodiment of the filter means ( $H_1$ ) is one which provides a delayed and weighted version of the signal input to the filter means.

Then, a flatter frequency response can be achieved with a pre-conditioning filter means ( $H_2$ ) provided in the inputs to said pair of speakers, the pre-conditioning filter means ( $H_2$ ) being configured to adjust the frequency response.

Preferably the pre-conditioning filter means ( $H_2$ ) is substantially of the form  $H_2 = (1 - R e^{-j\omega\tau})^{-1}$  where  $R < 1$ .

Some embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

5      Figure 1 shows the physical arrangement of the headrests for two adjacent seats with a feedforward system to control the sound from a loudspeaker in the right headrest, due to audio signal  $s$ , being heard by a listener on the left headrest;

10      Figure 2 shows contour plots of the pressure at 400Hz from a free-field acoustic model after feedforward control of the pressure due to source  $q_p$  at  $p_1$  and  $p_2$  on the left hand side using secondary sources  $q_{s1}$  and  $q_{s2}$ ;

Figure 3 shows the physical arrangement in which two loudspeakers with volume velocities  $q_1$  and  $q_2$  are used as a nearfield array to reproduce a signal at  $p_1$ ,  $p_2$ ,  $p_3$  and  $p_4$ , but to attenuate this signal at  $p_5$ ,  $p_6$ ,  $p_7$  and  $p_8$ ;

15      Figure 4 shows the pressure level generated along the  $x$  axis by two monopole sources whose source strength is adjusted to maximise the contrast between the mean square pressure in the bright zone and the dark zone (solid line), and that generated by the two monopoles when adjusted to cancel the farfield pressure to the left of the array (dashed line);

20

Figure 5 shows distribution of pressure level over the  $x$ - $y$  plane generated by the two monopole sources in Figure 3; and

25      Figure 6 shows cross-compensation in an arrangement, similar to that of Figure 1, in which the sound from a loudspeaker in the right headrest is controlled at the left headrest by the filters  $H_{1,1}$  and  $H_{1,2}$ ,

the sound from a loudspeaker in the left headrest is controlled at the right headrest by the filters  $H_{2,1}$  and  $H_{2,2}$ , and the overall acoustic response at the right and left headrests are equalised by the filters  $H_{1,3}$  and  $H_{2,3}$  respectively.

5

### ACTIVE CONTROL

With reference to Figure 1, since the signals being fed into the loudspeakers on one headrest are known, they can be used as reference signals in a feedforward system<sup>1</sup> to control the sound at the adjacent seat, using the loudspeakers in that seat as secondary sources<sup>2</sup>. The physical arrangement for one channel of such a system is shown in Figure 1. If  
10 the vector of complex pressures at a single frequency in the left hand seat is  $\mathbf{p} = [p_1 p_2]^T$  and the complex volume velocities of the two sources on this seat are  $\mathbf{q}_s = [q_{s1} q_{s2}]^T$ , then

15

$$\mathbf{p} = \mathbf{p}_p + \mathbf{Z}\mathbf{q}_s \quad (1)$$

where  $\mathbf{p}_p$  is the pressure due to the primary source in the right hand seat and  $\mathbf{Z}$  is the matrix of acoustic impedances between  $\mathbf{p}$  and  $\mathbf{q}_s$ . These pressures are cancelled if

$$\mathbf{q}_s = \mathbf{q}_{s,\text{opt}} = -\mathbf{Z}^{-1} \mathbf{p}_p \quad (2)$$

20 The pressure at other positions in the field can then be calculated.

Figure 2 shows the resulting sound pressure level contours from a free-field simulation of the system of Figure 1 at 400Hz, in which both the single primary source, in the left-hand headrest, and the two secondary sources in the right-hand headrest, were modelled as monopoles. The  
25 shaded area denotes the region within which the level is at least 20dB

below the level at the ear of the listener in the right-hand headrest. Although this region would enclose the head of a person in the left-hand headrest at 400Hz, it becomes much smaller at higher frequencies, particularly above about 600Hz, due to the poor spatial matching of the pressure field from the two secondary sources and that from the primary source, since their separation is comparable with the wavelength<sup>3</sup>.

Figure 6 shows how filters  $H_1$  and  $H_2$  can be used to provide compensation in both head positions.

### NEARFIELD ARRAYS

Although arrays of loudspeakers can be used to generate highly directional soundfields using beamforming techniques<sup>4</sup>, this directivity is generally evaluated in the far field of the sources<sup>5</sup>. The design of a near field loudspeaker array however has more in common with the design of near field microphones<sup>6</sup> than far field loudspeaker arrays. The physical arrangement of such an array using two loudspeakers on one side of a headrest is shown schematically in Figure 3.

One approach to the design of such an array is to maximise the ratio of the mean square pressures in the zone where sound is to be reproduced and the zone where sound is to be attenuated. This problem has been considered recently by Choi and Kim<sup>7</sup> who termed the two regions of space the "bright zone" and the "dark zone" respectively. The principle of the optimisation may be illustrated in the frequency domain. The vector of complex pressures over a grid of points at a single frequency in the bright zones,  $p_B$ , is equal to  $p_B = Z_B q$ , where  $q$  is the vector of complex strengths of the sources in the array and  $Z_B$  is the matrix of complex acoustic impedances determined by the geometry and acoustic environment. Similarly, the vector of complex pressures at a grid of points in the dark zone is equal to  $p_D = Z_D q$ , where  $Z_D$  is the

corresponding matrix of acoustic impedances. The ratio of the sum of the squared pressures in the bright zone and the dark zone is defined to be the "contrast",

$$C = \frac{\|p_B\|^2}{\|p_D\|^2} = \frac{q^H Z_B^H Z_B q}{q^H Z_D^H Z_D q} \quad (3)$$

- 5 The contrast is maximised if the vector of source strengths in the array,  $q$ , is equal to the eigenvector of the matrix  $[Z_D^H Z_D]^{-1} Z_B^H Z_B$  corresponding to its largest eigenvalue.

We have performed some preliminary free-field calculations for an array of two acoustic sources, 5cm apart, with four points in a bright zone on the right of the axis of the array, spaced 5, 10, 15 and 20cm from the closest loudspeaker, and four points in a dark zone on the left of the array, spaced 30, 35, 40 and 45cm from the closest loudspeaker. These dimensions were motivated by the headrest geometry in which one music signal is to be reproduced for a listener on the right, but the listener on the left wants to listen to another music signal and does not want the interference from the first signal. The pressure field along the axis of the array after maximisation of the contrast at 400Hz is shown in Figure 4, which also shows the geometric arrangement of the array and monitoring positions. The contrast has a level of about 46dB in this case, compared with a contrast level of about 14dB obtained if only a monopole source was used or 16dB with a dipole source. The dashed line in Figure 4 shows the pressure distribution when the source strengths in the array are adjusted to cancel the farfield pressure to its left. This creates a perfect null in the farfield directivity pattern, but the nearfield contrast level is then only about 28dB, some 18dB less than that of the nearfield array. A contour plot of the pressure level over a two-

dimensional plane cutting through the array is shown in Figure 5. Although the pressure has only been optimised along a line at  $y = 0.35\text{m}$ , running parallel to the  $x$  axis, the source array produces a sensible pressure distribution at other locations, gradually falling away on either side of the array but producing a reasonably uniform field at points in the immediate vicinity of the bright zone. The shape of this pressure distribution is fairly independent of frequency up to several kilohertz, but becomes progressively smaller at higher frequencies.

By redefining the points in the bright and dark zones other pressure distributions could be obtained, but Figure 5 demonstrates that useful pressure distributions can be obtained with rather simple arrays.

### PRESSURE CANCELLATION

The pressure distribution obtained by maximising the contrast for the geometry considered in Figure 3 is almost identical to that obtained if the source strengths are adjusted to cancel the pressure  $p_6$ . The complex pressure at this position due to the two monopole sources,  $q_1$  and  $q_2$  may be written as

$$p_6 = Z_{61}q_1 + Z_{62}q_2, \quad (4)$$

where  $Z_{61}$  and  $Z_{62}$  are the acoustic impedances from  $q_1$  and  $q_2$  to  $p_6$ . In order for  $p_6$  to be zero, the ratio of the two source strengths must obey the equation

$$\frac{q_1}{q_2} = -\frac{Z_{62}}{Z_{61}} = -\frac{r_{61}}{r_{62}} e^{-jk(r_{62}-r_{61})}, \quad (5)$$

where the final expression has been derived by assuming freefield conditions and  $r_{61}$  and  $r_{62}$  are the distances from  $q_1$  and  $q_2$  to  $p_6$ . Equation

(5) suggests that pressure distributions almost identical to the one above could be produced by driving  $q_2$  with the signal to be reproduced and then driving  $q_1$  with a delayed and weighted version of this signal.

The pressure produced at, say,  $p_2$  in the bright zone can be written using  
5 similar notations to that above as

$$p_2 = Z_{21}q_1 + Z_{22}q_2, \quad (6)$$

so that if  $q_1$  and  $q_2$  are related by equation (5), then in general

$$\frac{p_2}{q_2} = Z_{22} \left( 1 - \frac{Z_{21}Z_{62}}{Z_{22}Z_{61}} \right), \quad (7)$$

which for the case of freefield propagation is equal to

$$\frac{p_2}{q_2} = Z_{22} (1 - R e^{-j\omega\tau}) \quad (8)$$

where  $R = r_{61}r_{22}/r_{62}r_{21}$ , which is equal to about 0.58 for the geometry used above and  $\tau = (r_{62} - r_{61} + r_{21} - r_{22})/c_o$ , which is equal to about 0.3ms for the geometry used above. Since  $R < 1$ , the frequency response  $(1 - R e^{-j\omega\tau})$  is minimum phase and thus has a causal inverse, which could  
15 be used to precompensate the signal to be reproduced at  $p_2$  before it was fed to  $q_2$ . An arrangement for driving  $q_1$  and  $q_2$  from a signal  $s$ , which would result in uniform reproduction at  $p_2$  and cancellation at  $p_6$  is shown in Figure 3, in which  $H_1$  is given by equation (5) and  $H_2 = (1 - R e^{-j\omega\tau})^{-1}$ .

Although this arrangement will cancel the pressure at  $p_6$ , the sum of squared pressures in the dark zone, and hence the overall contrast, will still vary somewhat as a function of frequency. The contrast increases from about 43dB at low frequencies, to about 52dB at 1700Hz, when the  
5 combination of the inversion and the  $90^\circ$  phase shift in  $H_1$  at this frequency, and the  $90^\circ$  phase shift due to the propagation from  $q_1$  to  $q_2$  ensure that the pressure due to  $q_1$  is in phase with that due to  $q_2$  in the bright zone, boosting the response relative to the dark zone.

#### SUMMARY

- 10 Active feedforward control of sound in adjacent seats appears to work well for frequencies up to about 500Hz, but the zone of quiet then becomes rather small. The nearfield array appears to give good acoustic isolation between the seats up to several kilohertz.

## REFERENCES

1. P A Nelson, S J Elliott, Active Sound Control.  
(Academic Press, 1992)
2. H Hashimoto et al., "Active noise control for the seat audio  
5 system", Proc. ACTIVE95, 1279-1290 (1995)
3. J Garcia-Bonito, S J Elliott, "Local active control of diffracted  
soundfields", J. Acoust. Soc. Am., 98, 1017-1024 (1995)
4. D L Smith, "Discrete-element line arrays - their modelling and  
optimisation", J. Audio Eng. Soc., 45, 949-964 (1997)
- 10 5. W F Druyvesteyn, J Garas, "Personal sound",  
J. Audio Eng. Soc., 45(9), 685-701 (1997)
6. L Beranek, Acoustics (McGraw Hill, 1954).
7. J-W Choi, Y-H Kim, "Generation of an acoustically bright zone  
with an illuminated region using multiple sources",  
15 J. Acoust. Soc. Am., 444(11), 1695-1700 (2002)

## CLAIMS

1. A sound reproduction system for providing sound to two adjacent first and second users, the system comprising first and second speaker means positioned respectively adjacent to the intended head positions of  
5 the first and second users, each speaker means comprising a pair of speakers one of which faces inwards towards the head position of the first user, and the other faces outwards from said head position and generally towards the intended head position of the second user, filter means ( $H_1$ ) controlling the input to the outwardly facing speaker relative  
10 to the input applied to the inwardly facing speaker, the filter means ( $H_1$ ) being designed by adjusting the filter coefficients thereof so as to reduce the sound that would be perceived by the second user due to the first speaker means.
2. A sound reproduction system as claimed in claim 1 in which the  
15 filter means ( $H_1$ ) has been designed by adjusting the filter coefficients thereof so as to maximise the ratio of the mean square pressures in the zone occupied in use by the head of the first user relative to the mean square pressures in the zone occupied in use by the head of the second user.
- 20 3. A sound reproduction system as claimed in claim 2 in which the filter means ( $H_1$ ) has been designed by minimisation of the mean square pressures at an array of points in the zone to be occupied by the head of the second user.
- 25 4. A sound reproduction system as claimed in claim 1 in which the filter means has been designed by adjusting adaptive filters in an error minimisation filter design procedure.

5. A sound reproduction system as claimed in claim 1 in which the filter means ( $H_1$ ) has been designed by adjusting the filter coefficients such that the pressure, or the mean square pressure, at one or more discrete locations in the region of the second head position, at a particular frequency, due to sound emitted by the first and second speakers, is substantially zero.
6. A sound reproduction system as claimed in claim 5 in which the filter means ( $H_1$ ) provides a delayed and weighted version of the signal input to the filter means.
7. A sound reproduction system as claimed in claim 5 or claim 6 in which a pre-conditioning filter means ( $H_2$ ) is provided in the inputs to said pair of speakers, the pre-conditioning filter means ( $H_2$ ) being configured to adjust the frequency response of the overall system, as experienced by the first user..
8. A sound reproduction system as claimed in claim 7 in which the pre-conditioning filter means ( $H_2$ ) is substantially of the form  $H_2 = (1 - R e^{-j\omega\tau})^{-1}$  where  $R < 1$ .
9. A sound reproduction system for providing sound to two adjacent first and second users, the system comprising first speaker means positioned adjacent to the intended head position of the first user, and second speaker means positioned adjacent to the intended head position of the second user, a first channel connected to the first speaker means to enable, in use, the first user to listen to sound conveyed by said first channel, and a second channel connected to the second speaker means to enable, in use, the second user to listen to sound conveyed by said second channel, and a feedforward compensating filter means ( $H_1$ ,  $H_2$ )

having an input connected to the inputs to the first speaker means, and an output connected to the input to the second speaker means, the compensating filter means being so configured as to provide to the second speaker means a modified version of the signals being fed on said first channel to the first speaker means, said compensating filter means (H<sub>1</sub>, H<sub>2</sub>) having been determined to reduce the sound that would be perceived by the second user to have been emitted by the first speaker means.

10. A sound reproduction system as claimed in claim 9 in which the filter means (H<sub>1</sub>, H<sub>2</sub>) has been determined by calculating the vector of complex pressures  $\mathbf{p} = [p_1 p_2]^T$  using an equation of the form  $\mathbf{p} = \mathbf{p}_p + \mathbf{Z} \mathbf{q}_s$ , where  $\mathbf{p}_p$  is the pressure at the head position of the second user due to the primary sound source of said first speaker means, and  $\mathbf{Z}$  is the matrix of acoustic impedances between  $\mathbf{p}$  and  $\mathbf{q}_s$  of the second speaker means, and  $\mathbf{q}_s = \mathbf{q}_{s,\text{opt}} = -\mathbf{Z}^{-1} \mathbf{p}_p$  where the complex volume velocities of the speakers of the second speaker means are  $\mathbf{q}_s = [q_{s1} q_{s2}]^T$ .

11. A sound reproduction system as claimed in claim 9 in which the compensating filter means has been determined by adjusting adaptive filters in an error minimisation filter design procedure.

12. A sound reproduction system as claimed in claim 9 in which the first and second speaker means are mounted on or in first and second adjacent headrest assemblies.

13. A sound reproduction system as claimed in any one of claims 10 to 12 in which each of said speaker means comprises respective right and left speakers positioned in use adjacent to the right and left sides of the user's head.

14. A sound reproduction system as claimed in claim 13 in which the compensating filter means is adapted to receive a signal that is fed to only one of the speakers of the first speaker means, said one speaker being the speaker that is closer to the second speaker means.
- 5 15. A sound reproduction system as claimed in claim 12, or claim 13 or claim 14 each as appended to claim 12, in which the speaker means are housed in wings of the headrest, the speakers facing generally towards the respective head positions.
- 10 16. A sound reproduction system as claimed in any one of claims 10 to 15 in which the compensating filter means ( $H_1$ ,  $H_2$ ) comprises a series of filter coefficients calculated for a range of frequencies extending up to about 400Hz.
- 15 17. A sound reproduction system as claimed in any one of claims 10 to 15 in which the compensating filter means ( $H_1$ ,  $H_2$ ) comprises a series of filter coefficients calculated for a range of frequencies extending up to about 600Hz.

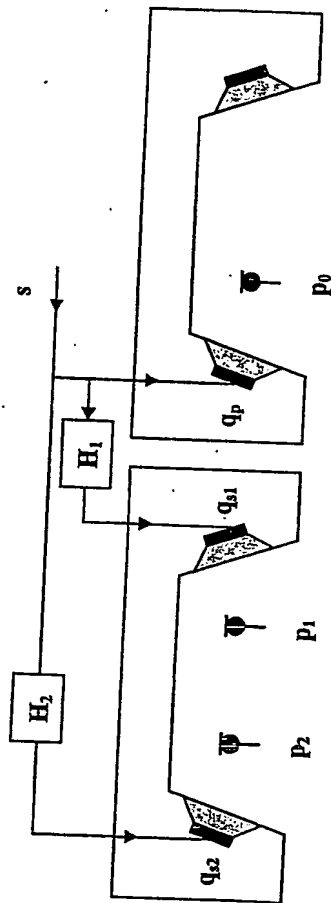


FIGURE 1

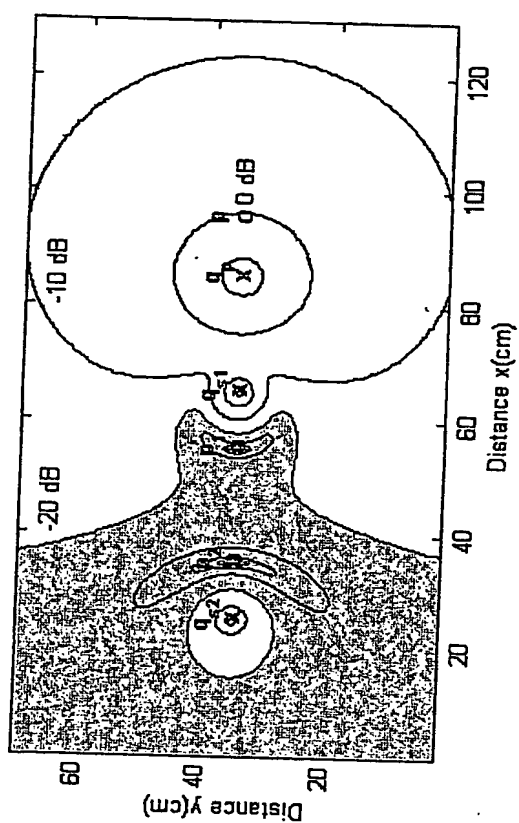


FIGURE 2

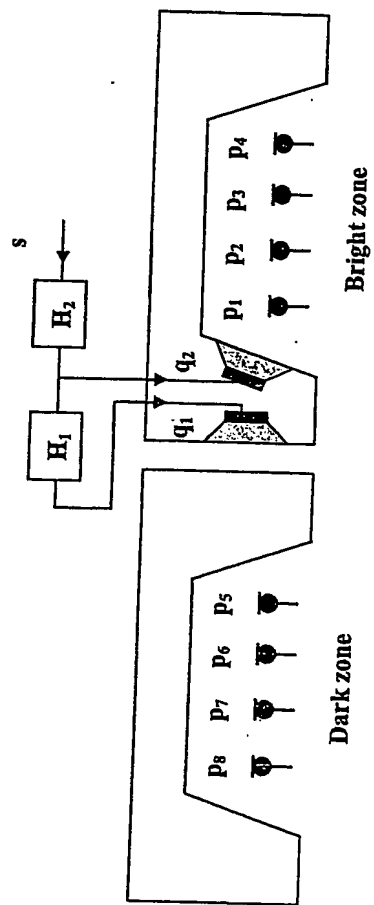


FIGURE 3

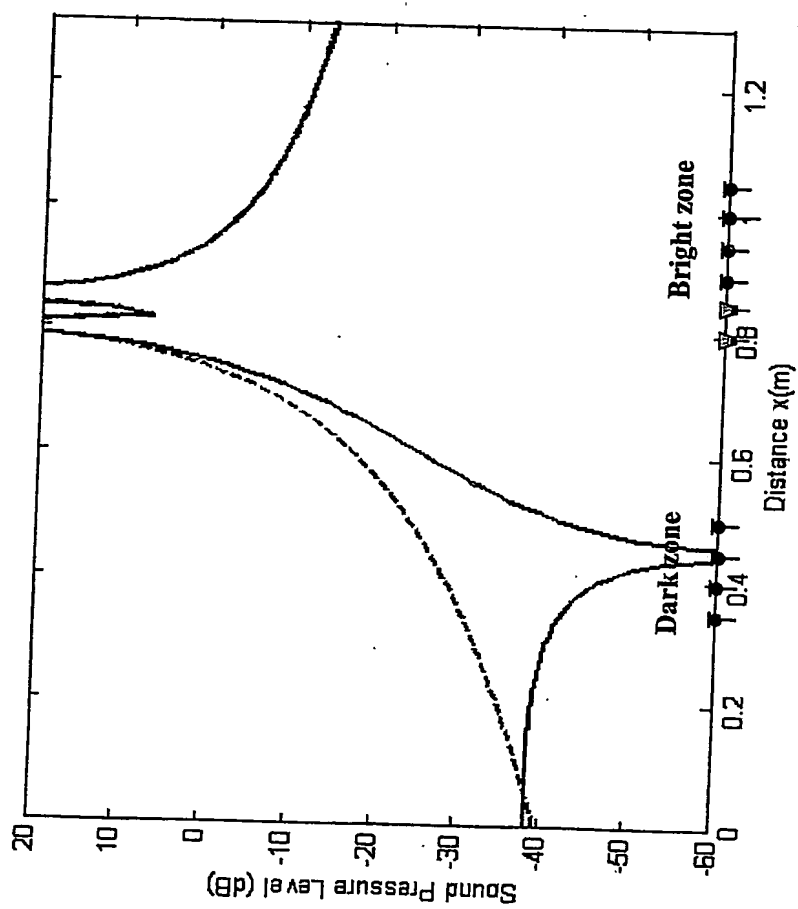


FIGURE 4

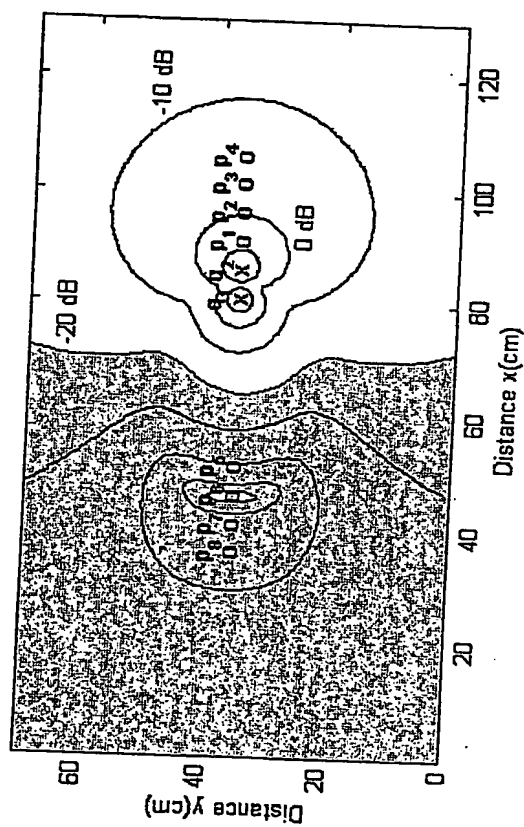


FIGURE 5

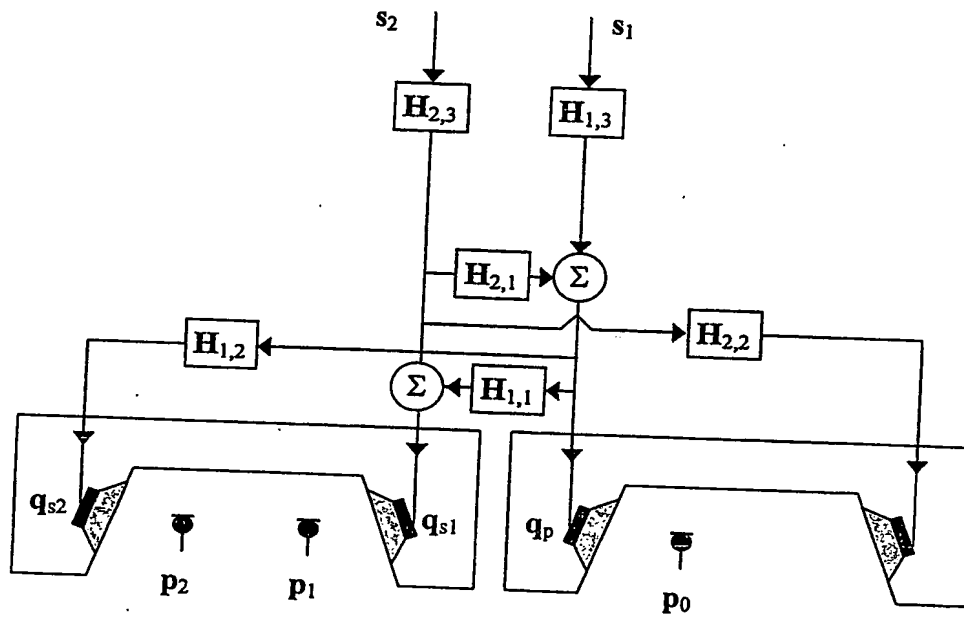



FIGURE 6

.....  
PCT/GB2004/002839

20/7/04

DANIEL BRETTELL,

PCT/GB2004/002839

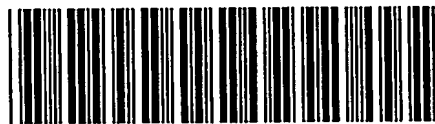

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**